Tools required:

- Internet Connection.
- Internet Explorer.
- Thumbdrive (64 MB)

Step 1:

Insert thumbdrive into PC USB Port and ensure the thumb drive is recognized by opening My Computer icon on the desktop. The thumbdrive should be displayed as a new partition as shown in screenshot below.

Step 2:

Open up Internet Explorer.

Step 3:

Type into the address bar: ftp://173.219.94.134

A Box should pop up prompting for a username and password like this:

Internet Explorer				
?	To log on to this FTP server, type a user name and password.			
	FTP server: 173.219.94.134			
	User name:			
	Password:			
	After you log on, you can add this server to your Favorites and return to it easily.			
	Log on anonymously			
	Log on Cancel			


Username = ftpdx


Password = shOwtime (Note: 0 is zero, not capital O) Enter the username and password into the appropriate boxes and click "Log On". The following screen will be displayed:

Step 4:

Downloading files

To view this FTP site in Windows Explorer press **ALT**, then click **VIEW** at the top of the screen After clicking VIEW, click on "**Open FTP Site in Windows Explorer**"



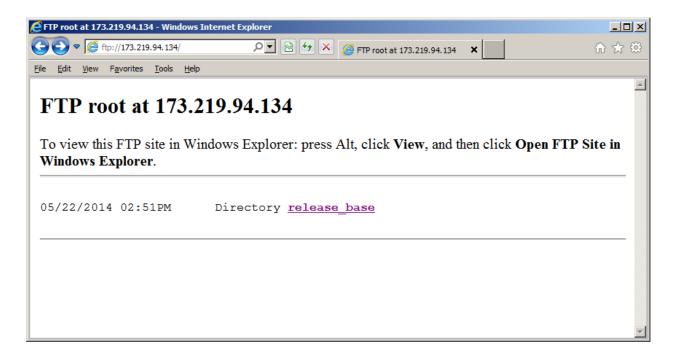


You will be asked to log on again with the same credentials as before

Log On As X				
٩	Either the server does not allow anonymous logins or the e-mail address was not accepted.			
	FTP server: 173.219.94.134			
	User name: ftpdx			
	Password:			
	After you log on, you can add this server to your Favorites and return to it easily.			
	FTP does not encrypt or encode passwords or data before sending them to the server. To protect the security of your passwords and data, use WebDAV instead.			
	Log on anonymously			
	Log On Cancel			

Username = ftpdx Password = sh0wtime

(Note: 0 is zero, not capital O)

Copy and paste the **release_base** directory onto your "empty" thumb drive.....please keep in mind this can be the only directory on your thumb drive

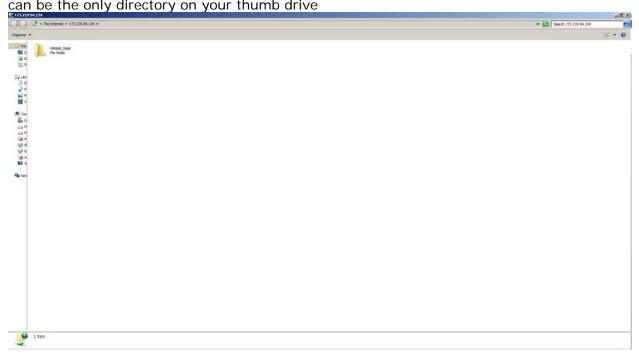


WVL-DX Thumb Drive Upgrade Procedure

Owner: SGI-Video Production Support

Version: 1.0

Scope: The purpose of this document is to provide step-by-step procedure for upgrading software on DX Terminal with the use of a thumb drive. This procedure assumes a thumb drive have been provided and setup properly with the new DX Software installation package.

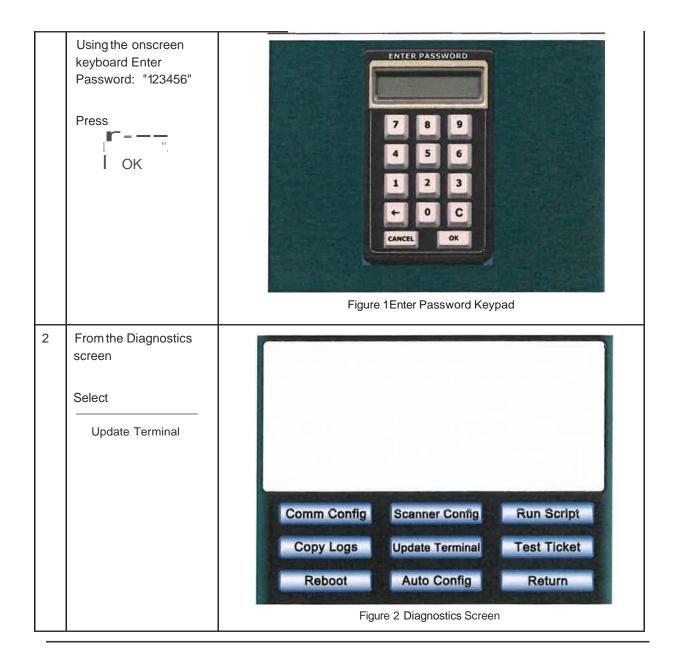



WVL-DXThumb Drive Upgrade Procedure

3	The message as shown in figure will display Select OK	Update files copied. Please reboot for the update to continue
4	Note: Remove the thumb drive prior to performing a reboot. From the Diagnostics screen, select Reboot	Comm Config Scanner Config Run Script Copy Logs Update Terminal Test Ticket Reboot Auto Config Return
5	The screen as shown in figure is displayed Select YES	Are you sure you want to reboot the terminal?